

IP67

IP67 1615 A G F

5 METER | 15 WATT | 24V DC | IP67 | CRI 93

Umgebungstemp.: -25° - 60° | Stunden: 50.000h L70|B10


UV + Chemikalien
RESISTENT



3
JAHRE
GARANTIE




Artikelnummer	Farbtemperatur	Lm/m	LED/m	Pitch	Trennstelle	W/m	MEL*
115333	2700K ■	718	120	8,33 mm	50 mm	15	5 m
115334	3000K ■	762					
115335	3500K ■	782					
115336	4000K ■	752					
115337	5300K ■	767					
115338	CCT						
	2700K ■	514	240	8,33 mm	50 mm	15	5 m
	5300K ■	511					
2700+5300K ■	1024						
115339	RGB ■ ■ ■	320	96	10,42 mm	125mm	11	7,5 m
115340	RGB+4000K ■ ■ ■	531				15	5 m



max. L*: 30 m | B: 16 mm | H: 15 mm

*MEL= maximale Einspeislänge des Flexbandes
**maximale produzierbare Länge des Flexbandes

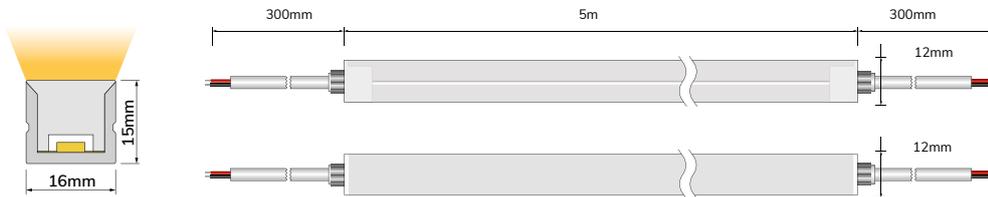

KABELANSCHLUSS
RÜCKSEITIG



KABELANSCHLUSS
STIRNSEITIG



KABELANSCHLUSS
SEITLICH

Montageclip Set IP67 Edelstahl

3er Set

[115766](#)

Montageclip Set IP 67 Aluminium

3er Set

[115767](#)

Kabel für LED-Flexband NeonPro

2-Polig, 2 x 0,5mm² 4-Polig, 4 x 0,5mm²

[115477](#)

[115479](#)

3-Polig, 3 x 0,5mm² 5-Polig, 5 x 0,3mm²

[115478](#)

[115480](#)