

IP67

IP67 1220 A G

5 METER | 15 WATT | 24V DC | IP67 | CRI 92

Umgebungstemp.: -25° - 60° | Stunden: 20.000h L70|B10


UV + Chemikalien
RESISTENT



3
JAHRE
GARANTIE




| Artikelnummer | Farbtemperatur | Lm/m | LED/m | Pitch | Trennstelle | W/m | MEL* |
|------------------------|---|------|-------|---------|-------------|-----|-------|
| 115341 | 2700K ■ | 436 | 120 | 8,33mm | 50mm | 15 | 5 m |
| 115342 | 3000K ■ | 492 | | | | | |
| 115343 | 3500K ■ | 500 | | | | | |
| 115344 | 4000K ■ | 475 | | | | | |
| 115345 | 5300K ■ | 490 | | | | | |
| 115346 | CCT | | 240 | 8,33mm | 50mm | 15 | 5 m |
| | 2700K ■ | 270 | | | | | |
| | 5300K ■ | 270 | | | | | |
| | 2700+5300K ■ ■ | 523 | | | | | |
| 115347 | RGB ■ ■ ■ | 240 | 95 | 10,42mm | 125mm | 11 | 7,5 m |
| 115348 | RGB+4000K ■ ■ ■ ■ | 313 | | | | 15 | 5 m |



max. L**: 30 m | B: 12 mm | H: 20 mm

*MEL= maximale Einspeislänge des Flexbandes
**maximale produzierbare Länge des Flexbandes

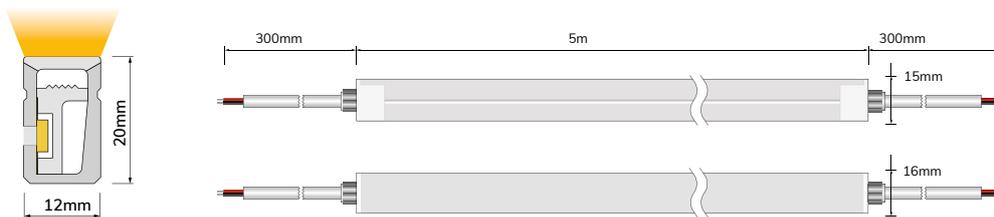

KABELANSCHLUSS
RÜCKSEITIG



KABELANSCHLUSS
STIRNSEITIG



KABELANSCHLUSS
SEITLICH

Montageclip Set Edelstahl

3er Set
[115483](#)

Montageclip Set IP68 Aluminium

3er Set
[115770](#)

Montageclip Set IP67 Aluminium

3er Set
[115773](#)

