

**IP67**

**IP67 1212** A  
T  
I  
G F

5 METER | 10 WATT | 24V DC | IP67 | CRI 93

Umgebungstemp.: -25° - 60° | Stunden: 20.000h L70|B10


UV + Chemikalien  
**RESISTENT**



**3**  
JAHRE  
GARANTIE




Artikelnummer	Farbtemperatur	Lm/m	LED/m	Pitch	Trennstelle	W/m	MEL*
115349	2700K <span style="display: inline-block; width: 10px; height: 10px; background-color: #f4a460; border: 1px solid black;"></span>	630	120	8,33mm	50mm	10	7,5 m
115350	3000K <span style="display: inline-block; width: 10px; height: 10px; background-color: #f4c470; border: 1px solid black;"></span>	646					
115351	3500K <span style="display: inline-block; width: 10px; height: 10px; background-color: #f4e480; border: 1px solid black;"></span>	677					
115352	4000K <span style="display: inline-block; width: 10px; height: 10px; background-color: #f4f490; border: 1px solid black;"></span>	627					
115353	5500K <span style="display: inline-block; width: 10px; height: 10px; background-color: #a4d4e4; border: 1px solid black;"></span>	644					
115354	CCT		240	8,33mm	50mm	10	5 m
	2700K <span style="display: inline-block; width: 10px; height: 10px; background-color: #f4a460; border: 1px solid black;"></span>	356					
	5500K <span style="display: inline-block; width: 10px; height: 10px; background-color: #a4d4e4; border: 1px solid black;"></span>	356					
115355	RGB <span style="display: inline-block; width: 10px; height: 10px; background: repeating-linear-gradient(45deg, transparent, transparent 2px, red 2px, red 4px); border: 1px solid black;"></span>	242	96	10,42mm	62,5mm	10	5 m

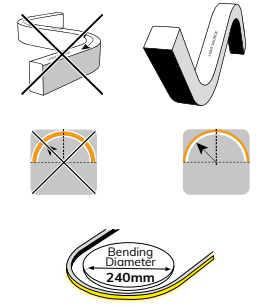

max. L\*\*: 30 m | B: 12 mm | H: 12 mm

\*MEL= maximale Einspeislänge des Flexbandes  
\*\*maximale produzierbare Länge des Flexbandes

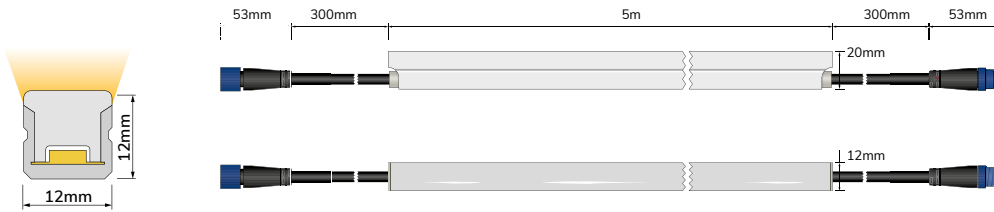

KABELANSCHLUSS  
RÜCKSEITIG



KABELANSCHLUSS  
STIRNSEITIG



KABELANSCHLUSS  
SEITLICH

## Kabel für LED-Flexband NeonPro

- 2-Polig, 2 x 0,5mm<sup>2</sup>    4-Polig, 4 x 0,5mm<sup>2</sup>  
**115477**                    **115479**
- 3-Polig, 3 x 0,5mm<sup>2</sup>    5-Polig, 5 x 0,3mm<sup>2</sup>  
**115478**                    **115480**