




S-TRACK

3-Phasen-Aufbauschiene DALI

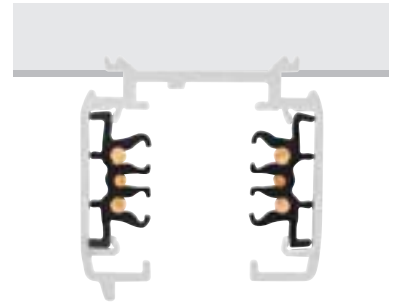

	1 m	1 m	2 m	2 m
Nennspannung (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
max. Stromstärke (A)	16	16	16	16
max. mech. Belastung	30 kg	30 kg	30 kg	30 kg
Farbe	● schwarz	○ weiß	● schwarz	○ weiß
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x B x H (cm)	100 x 3,6 x 3,6	100 x 3,6 x 3,6	200 x 3,6 x 3,6	200 x 3,6 x 3,6
Art.Nr.	1004937	1004938	1002631	1002632
EUR	45,50	45,50	81,00	81,00

	3 m	3 m	4 m	4 m
Nennspannung (V)	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz	220-250V ~50/60Hz
max. Stromstärke (A)	16	16	16	16
max. mech. Belastung	30 kg	30 kg	30 kg	30 kg
Farbe	● schwarz	○ weiß	● schwarz	○ weiß
Material	Aluminium	Aluminium	Aluminium	Aluminium
L x B x H (cm)	300 x 3,6 x 3,6	300 x 3,6 x 3,6	400 x 3,6 x 3,6	400 x 3,6 x 3,6
Art.Nr.	1002633	1002634	1002635	1002636
EUR	117,00	117,00	147,00	147,00